



ACRYLIC

3/16" Rigid Plastic
Printed Directly on the Back with a White Underbase (Second Surface Print)

Common Uses
Photographs, Logos & More

Longevity
Long-term

Environment
Indoor

Print Sides
Single-sided

Size Options
Custom Size

Options
Contour Cut
Rounded Corners
Aluminum Wall Standoffs
Spot White (Transparency)

Technical Data >

TECHNICAL DATA SHEET

PHYSICAL & CHEMICAL PROPERTIES

Appearance: Colorless
Odor: Odorless
Physical State: Sheets
pH as Supplied: Not Applicable
pH (Other): Not Applicable
Boiling Point: Not Applicable
Melting Point: Not Applicable
Freezing Point: Not Applicable
Vapor Pressure (mmHg): Not Applicable
Vapor Density (Air=1): Not Applicable

COMPOSITION/INFO ON INGREDIENTS

This material is classified as not hazardous under OSHA regulations
Acrylic Copolymer: 98.5-99
Process & performance additive: 1.5-1
OSHA PEL-TWA : ppm (ND) | mg/m3 (ND)
OSHA PEL STEL: ppm (ND) | mg/m3 (ND)
OSHA PEL CEILING: ppm (ND) | mg/m3 (ND)

ACGIH TLV-TWA: ppm (ND) | mg/m3 (ND)
ACGIH TLV STEL: ppm (ND) | mg/m3 (ND)
ACGIH TLV CEILING: ppm (ND) | mg/m3 (ND)


EMERGENCY OVERVIEW

Color: Colorless or Colored
Appearance: Sheets
Odor: Odorless

Continued >

WALL STANDOFFS

Aluminum wall standoffs that stand 3/4" from the wall. Available in silver or black. For custom wall standoff placement, please place 7/16" (.4375") circles in your cut file. The circles should be a minimum of .4" away from the edges.

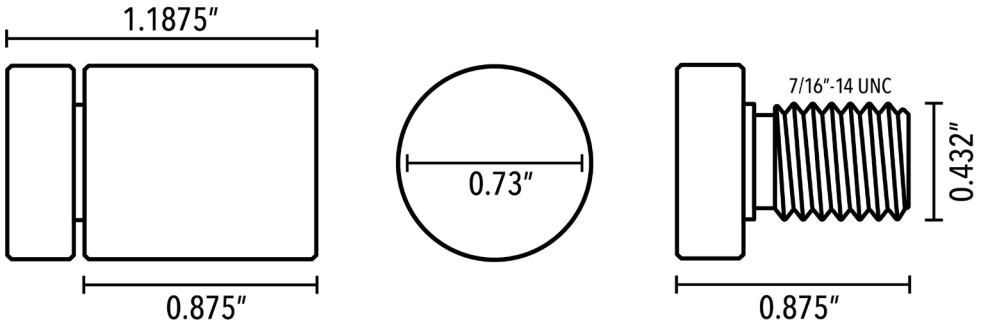

IDX TEXAS

www.idxde.com | 903-660-9094 | engraveus@idxtx.com

IDX DESIGN & ENGRAVING | FLINT, TX